


Performance Curve

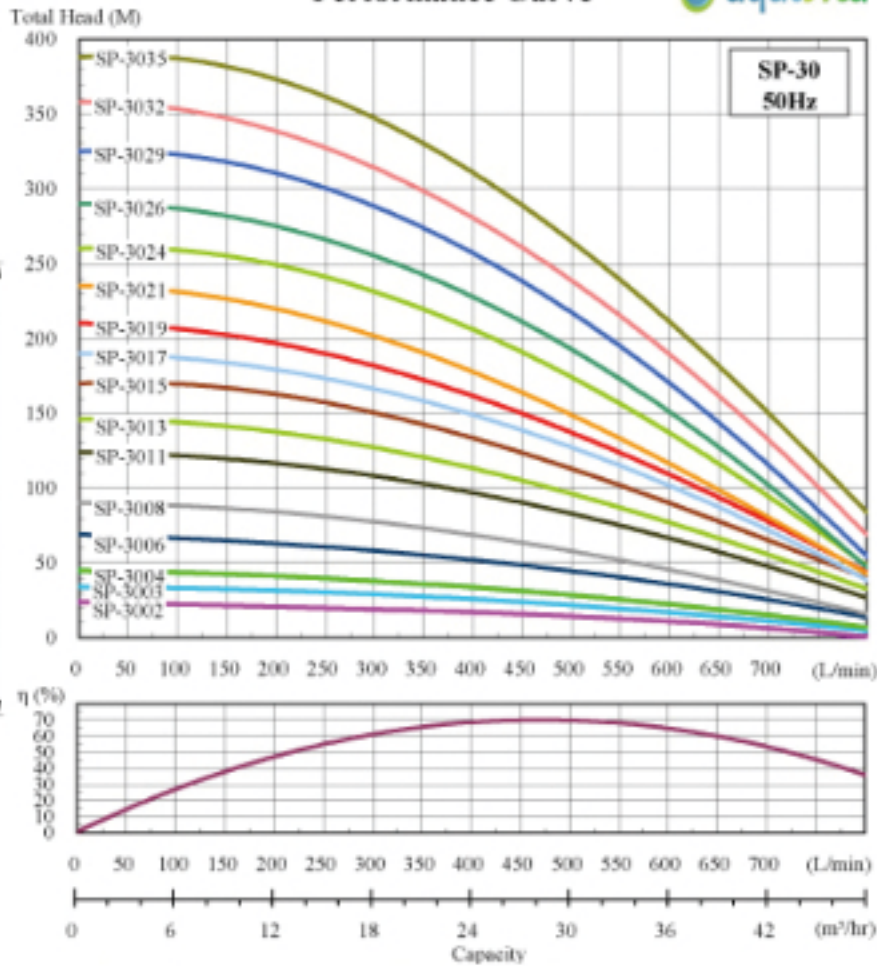

TYPE	Dimensions(mm)				Weight KG	Motor		Max.current t		TOTAL HEAD M	HEAD M	M³/hr								
	A	B	C	D		HP	Kw	220V	380V			L/min								
												0	18	24	30	36	42			
SP-3002	3"	121	135	449	6.5	3	2.2	9.5	5.5	24	16	24	19	17	15	11	6			
SP-3003				545	8.2	4	3	13.3	7.7	34	21	34	21	34	29	26	22	17	11	
SP-3004				641	9.9	5	3.7	15.4	8.9	45	28	45	28	45	38	34	28	23	15	
SP-3006				833	13.8	7.5	5.5	22.2	12.8	69	42	69	42	69	58	52	45	36	25	
SP-3008				###	17.3	10	7.5	28.5	16.5	90	57	90	57	90	78	68	58	46	31	
SP-3011				###	22.7	15	11	41.8	24.2	124	77	124	108	97	124	108	97	83	67	47
SP-3013				###	26.1	15	11	42	24	146	91	146	127	113	146	127	113	97	77	55
SP-3015				1697	29.6	20	15	55	32	170	106	170	150	134	170	150	134	113	90	65
SP-3017				1889	33.2	20	15	55	32	190	122	190	167	148	190	167	148	127	103	71
SP-3019				2081	36.7	25	18.5	69	40	210	137	210	182	161	210	182	161	137	110	77
SP-3021				2273	40.2	25	18.5	69	40	235	152	235	202	177	235	202	177	149	117	80
SP-3024				2561	45.3	30	22	81	47	260	179	260	230	207	260	230	207	175	137	93
SP-3026				2753	48.7	30	22	81	47	290	192	290	255	227	290	255	227	194	152	100
SP-3029				3041	53.8	35	26	96	56	325	218	325	287	257	325	287	257	220	170	113
SP-3032				3329	58.9	40	30	111	64	358	243	358	313	281	358	313	281	240	190	130
SP-3035	3617	64	40	30	111	64	388	262	388	346	311	388	346	311	267	211	148			