



Total Head (M)

Performance Curve

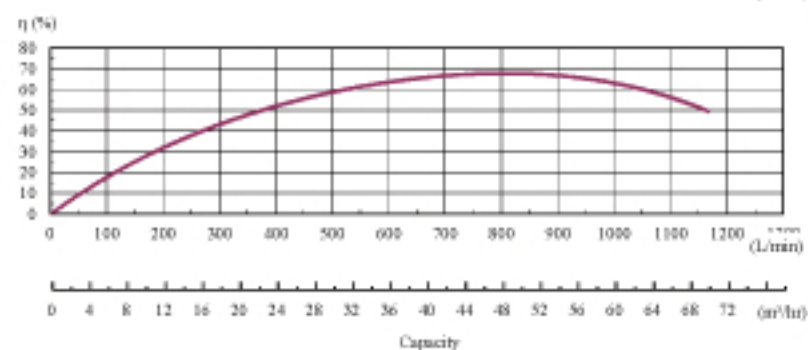

TYPE	DIMENSIONS(mm)				WEIGHT KG	MOTOR		TOTAL HEAD M	HEAD M	MP/hr 0	42	48	54	60	66
	A	B	C	D		HP	Kw								
SP-6020	4"	132	152	2538	49.2	50	37	268	150	293	201	184	168	153	136
SP-6018				2318	44.8	50	37	242	134	265	185	170	155	141	126
SP-6017				2208	42.6	40	30	229	126	249	175	158	145	132	116
SP-6016				2098	40.4	40	30	216	118	234	162	148	135	123	108
SP-6015				1988	38.2	35	26	203	110	218	152	138	127	116	103
SP-6014				1878	36	35	26	190	102	204	142	130	120	109	96
SP-6013				1649	33.7	35	26	176	95	190	132	121	110	100	87
SP-6012				1762	31.4	30	22	162	88	174	120	120	107	90	85
SP-6011				1536	29.2	30	22	149	81	161	119	109	103	88	68
SP-6010				1423	26.9	25	18.5	136	74	145	104	98	94	82	60
SP-6009				1314	24.6	25	18.5	122	66	131	91	83	76	69	61
SP-6008				1197	22.3	20	15	108	58	116	82	77	70	59	45
SP-6007				1084	20.1	20	15	95	52	102	70	64	59	54	47
SP-6006				971	17.8	15	11	81	45	88	62	57	50	41	34
SP-6005				873	15.4	15	11	67	38	71	50	46	42	38	33
SP-6004				745	13.2	10	7.5	53	29	57	37	34	30	26	21
SP-6003				617	11	7.5	5.5	40	20	45	30	27	25	21	17
SP-6002				504	8.7	7.5	5.5	27	13	31	20	18	17	14	12
SP-6001				391	6.4	3	2.2	12	6	15	9	9	8	7	6

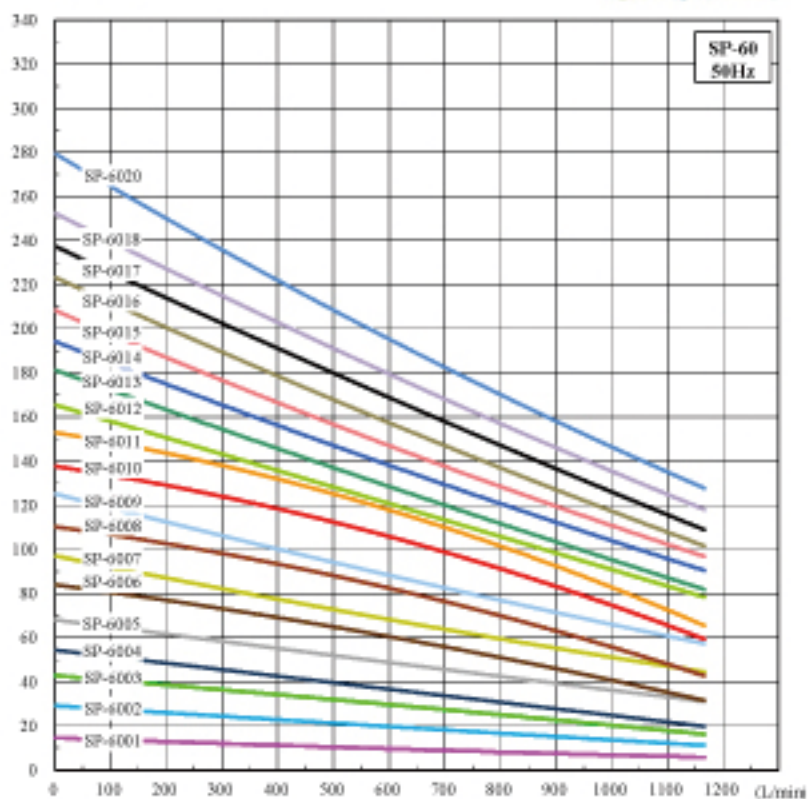