


Performance Curve



TYPE	Dimensions(mm)				Weight KG	Motor		Max.current I		TOTAL HEAD M	HEAD M	M³/hr					
	A	B	C	D		HP	Kw	220V	380V			0	12	15	18	21	23
												L/min					
												0	200	250	300	350	383
SP-1701				317	4.6	0.75	0.55	2.6	1.5	12	7	12	10	8	7	6	4
SP-1702				377	5.9	1.5	1.1	5.2	3.0	22	17	22	19	18	14	12	9
SP-1704				497	8.5	3	2.2	9.5	5.5	43	29	43	38	33	29	23	18
SP-1705				557	9.8	4	3	13.3	7.7	53	37	53	48	43	37	29	22
SP-1706				617	11.1	5	3.7	15.4	8.9	64	45	64	56	50	43	34	27
SP-1707				677	12.4	5.5	4	17	10.4	75	52	75	66	59	51	40	32
SP-1710				857	16.1	7.5	5.5	22.2	12.8	108	75	108	95	86	74	58	48
SP-1713				1052	20.3	10	7.5	28.5	16.5	141	98	141	124	112	95	75	60
SP-1717				1292	25.4	12.5	9.3	36	20.9	184	128	184	163	147	126	100	80
SP-1720	2 1/2" NPT		135	1472	29.2	15	11	41.8	24.2	216	150	216	192	173	147	116	95
SP-1722				1592	31.8	17.5	13	50	29	239	168	239	212	190	163	129	105
SP-1724				1712	34.3	17.5	13	50	29	260	181	260	230	208	178	140	115
SP-1727				1892	38.2	20	15	55	32	291	207	291	259	234	200	158	128
SP-1729				2012	40.8	25	18.5	69	40	314	228	314	279	250	215	170	138
SP-1731				2132	43.4	25	18.5	69	40	335	243	335	298	269	230	181	148
SP-1733				2252	46	25	18.5	69	40	355	255	355	315	285	243	191	157
SP-1736				2432	49.9	30	22	81	47	390	281	390	348	313	268	210	170
SP-1738				2552	52.5	30	22	81	47	410	293	410	365	330	281	222	180
SP-1740				2672	55.1	30	22	81	47	433	322	433	384	346	296	235	190

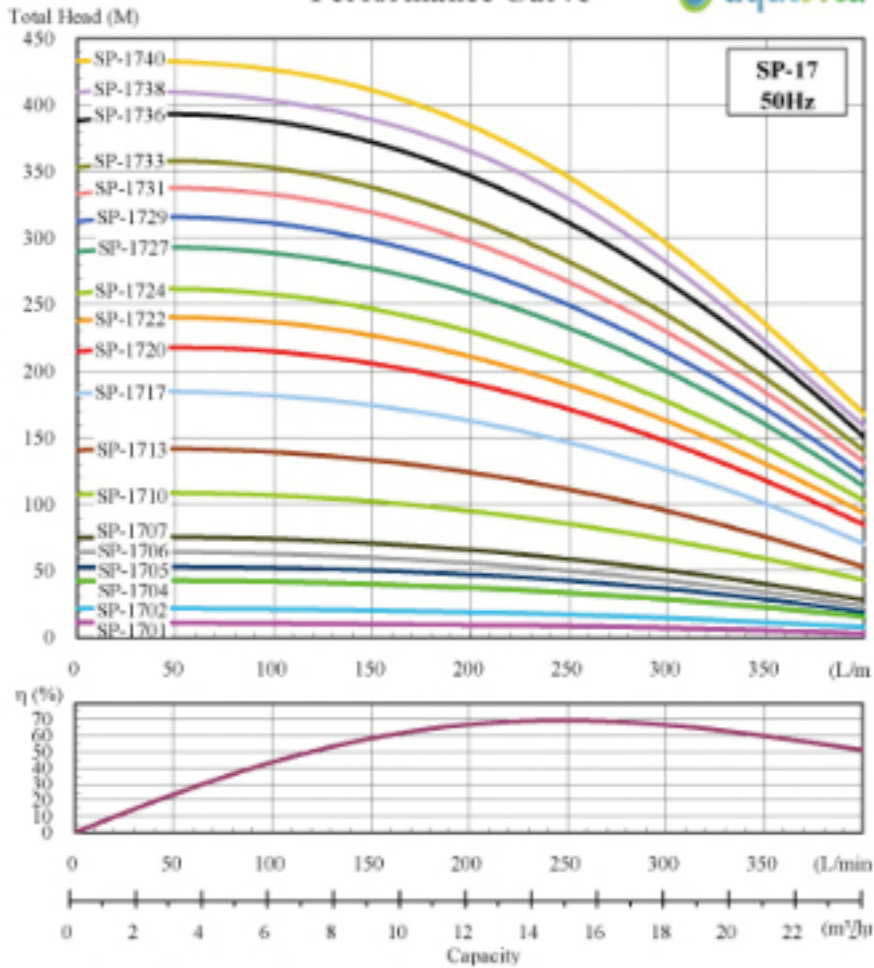