


Performance Curve

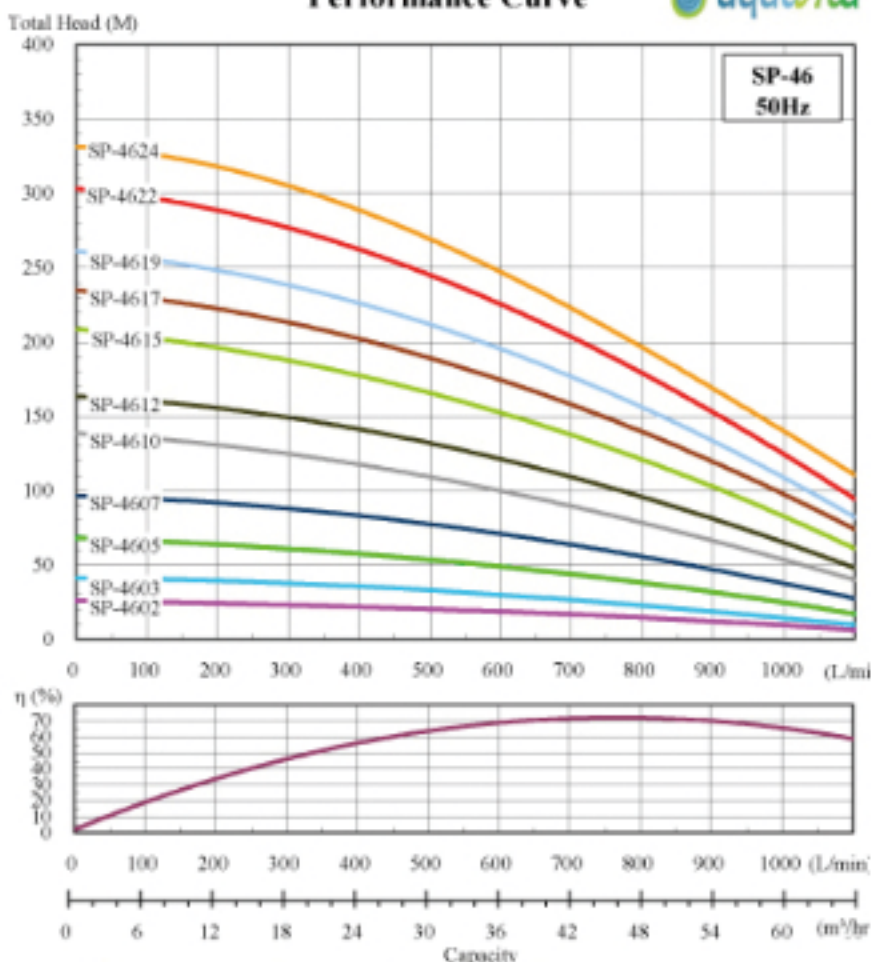

TYPE	Dimensions(mm)				Weight KG	Motor		Max.current t		TOTAL HEAD		M³/hr					
	A	B	C	D		HP	Kw	220V	380V	M	M	L/min					
					0							15	24	30	48	60	
SP-4602	4"	132	152	504	8.45	4	3	13.3	7.7	26	15	26	23.5	22	20	15	9
SP-4603				617	10.7	7.5	5.5	22.2	12.8	41	25	41	39	35	33	23	14
SP-4605				858	15.2	10	7.5	28.5	16.5	68	40	68	63	57	53	39	24
SP-4607				1084	19.7	15	11	41.8	24.2	96	56	96	92	82	76	57	37
SP-4610				1423	26.5	20	15	55	32	138	81	138	130	117	107	80	53
SP-4612				1649	31	25	18.5	69	40	163	99	163	155	140	130	98	64
SP-4615				1988	37.8	30	22	81	47	208	125	208	195	176	163	124	81
SP-4617				2214	42.3	35	26	96	56	234	147	234	222	200	186	143	96
SP-4619				2440	46.7	40	30	111	64	260	155	260	248	224	208	160	107
SP-4622				2779	53.3	50	37	138	80	302	184	302	288	260	241	183	123
SP-4624				2892	57.8	50	37	138	80	330	204	330	317	287	265	199	140