




### Performance Curve



TYPE	Dimensions(mm)				Weight KG	Motor		Max.current Amp		TOTAL HEAD M	HEAD M	M³/hr						
	A	B	C	D		HP	Kw	220V	380V			L/min						
												0	18	27	30	39	48	
SP-3001	3"	121.3	135	353	4.8	2	1.5	8.1	4.9	18	12	18	15	13	12	9	5	
SP-3002				449	6.5	4	3	14.1	8.5	32	24	32	29	26	24	20	13	
SP-3003				545	8.2	5.5	4	19.7	8.9	48	36	48	45	38	36	29	18	
SP-3004				641	9.9	7.5	5.5	24.6	11.9	67	50	67	59	53	50	41	28	
SP-3005				737	11.6	10	7.5	32.2	14.9	80	64	80	75	67	64	53	36	
SP-3007				929	15.6	12.5	9.3	42.3	25.6	115	91	115	106	94	91	77	55	
SP-3008				###	17.3	15	11	17.4	28.6	130	104	130	121	108	104	87	61	
SP-3010				###	20.9	17.5	13	55	33.3	163	130	163	152	136	130	110	77	
SP-3011				###	22.7	20	15	60.6	36.6	180	143	180	167	148	143	120	86	
SP-3012				###	24.5	25	18.5	75	45	197	158	197	184	166	158	133	95	
SP-3014				###	27.9	25	18.5	75	45	227	183	227	210	189	183	156	107	
SP-3015				1697	29.6	30	22	90.4	55	247	198	247	230	207	198	167	120	
SP-3017				1889	33	30	22	90.4	54.7	278	219	278	256	227	219	187	130	
SP-3021				2273	39.8	40	30	124	75	342	269	342	318	280	269	227	162	
SP-3023				2465	43.2	40	30	124	75	378	292	378	346	305	292	248	175	
SP-3024				2561	44.9	50	37	154	93	396	315	396	370	328	315	267	190	
SP-3026	2753	48.3	50	37	154	93	425	341	425	396	356	341	286	200				
SP-3028	2945	51.7	50	37	154	93	458	363	458	424	377	363	306	218				
SP-3029	3041	53.4	60	45	182	110	478	383	478	445	399	383	322	230				
SP-3031	3233	56.8	60	45	182	110	508	403	508	472	420	403	340	240				
SP-3033	3425	60.2	60	45	182	110	540	429	540	505	449	429	360	250				

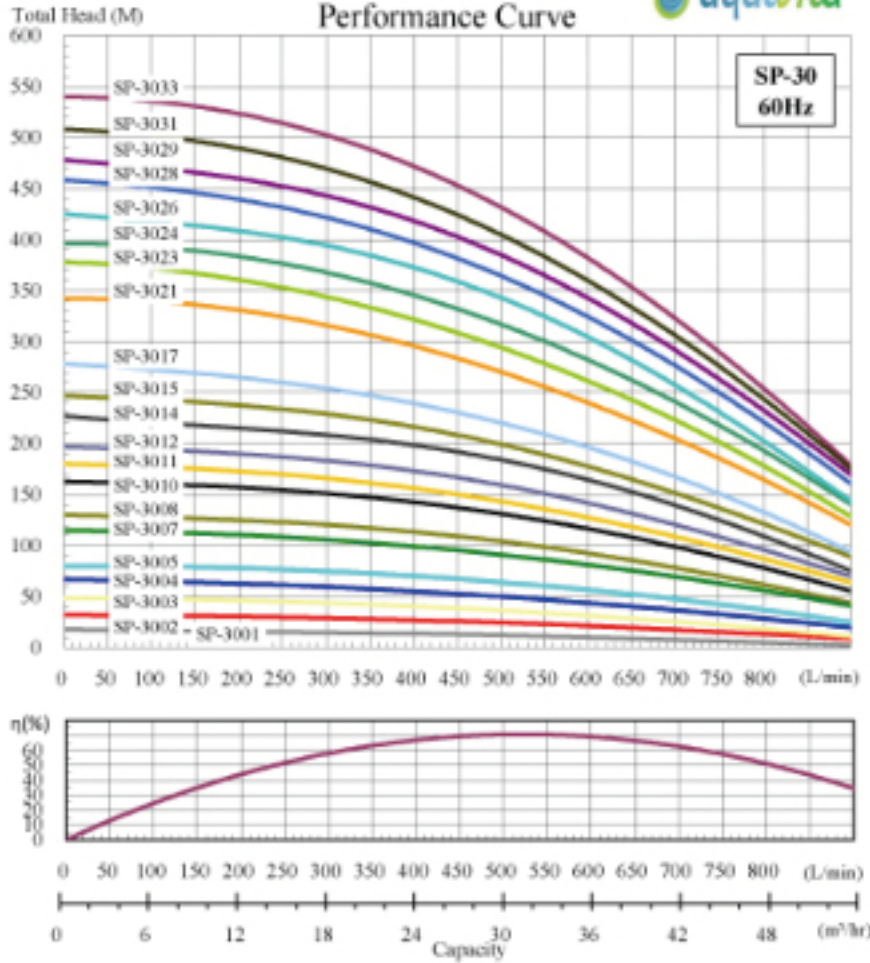