


Performance Curve



Total Head (M)

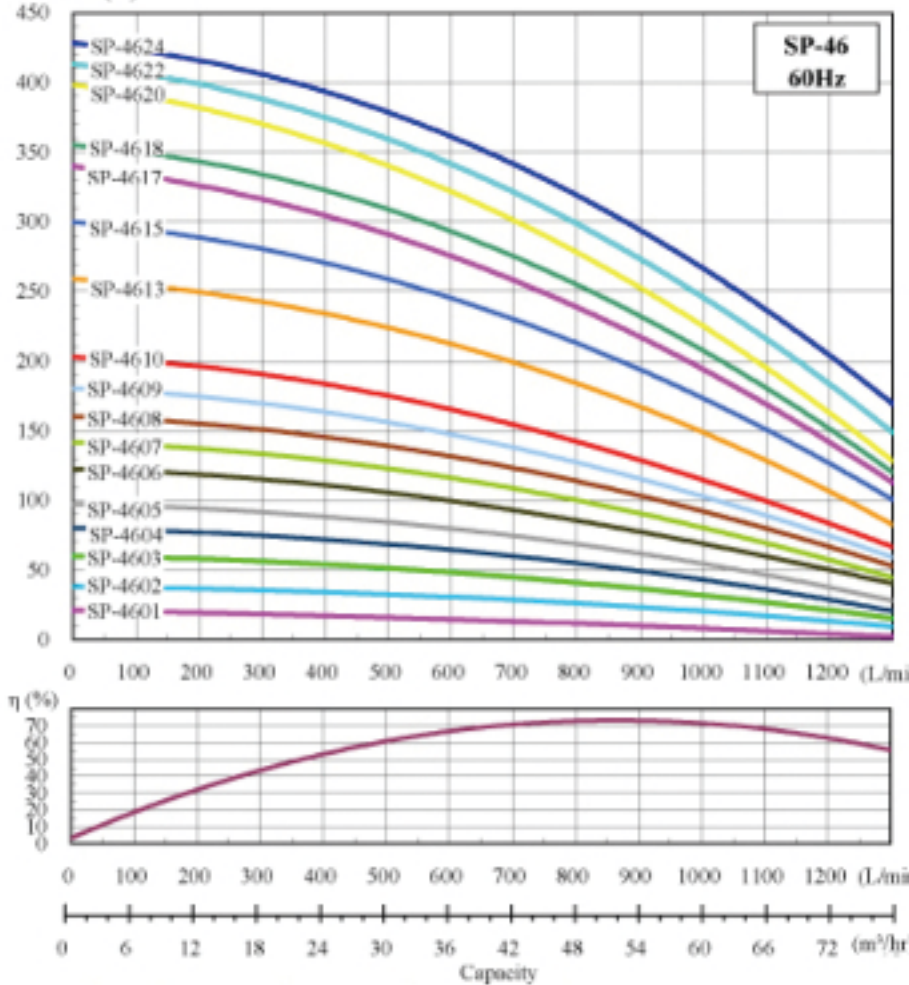

TYPE	Dimensions(mm)				Weight KG	Motor		Max.current t		TOTAL HEAD M	HEAD M	M³/hr					
	A	B	C	D		HP	Kw	220V	380V			L/min					
												0	18	30	48	60	72
SP-4601	4"	132	152	391	6.3	4	3	14.1	8.5	21	14	21	18	16	12	8	4
SP-4602				504	8.5	7.5	5.5	24.6	14.9	38	27	38	36	32	26	21	13
SP-4603				617	10.7	10	7.5	32.2	19.5	60	40	60	57	51	40	33	21
SP-4604				730	12.9	12.5	9.3	42.3	25.6	80	53	80	76	67	55	44	28
SP-4605				843	15.1	17.5	13	55	33.3	97	68	97	93	83	68	56	37
SP-4606				956	17.3	20	15	60.6	36.6	122	82	122	117	104	85	70	50
SP-4607				1069	19.5	25	18.5	75	45	141	96	141	136	121	98	83	57
SP-4608				1182	21.7	25	18.5	75	45	160	109	160	153	137	113	94	66
SP-4609				1295	23.9	30	22	90.4	54.7	180	123	180	172	154	126	105	74
SP-4610				1408	26.1	30	22	90.4	54.7	202	139	202	194	172	141	117	83
SP-4613				1747	33	40	30	124	75	258	177	258	247	220	182	153	105
SP-4615				1973	37.6	50	37	154	93	299	212	299	285	254	212	177	125
SP-4617				2199	42.2	50	37	154	93	338	243	338	322	287	237	197	140
SP-4618				2312	44.5	60	45	182	110	355	257	355	337	305	252	214	150
SP-4620				2538	49.1	60	45	182	110	397	289	397	376	335	276	230	161
SP-4622				2764	53.5	85	63	266	161	415	311	415	385	359	299	250	181
SP-4624	2990	57.9	85	63	266	161	433	353	433	394	383	322	270	201			

