


Performance Curve

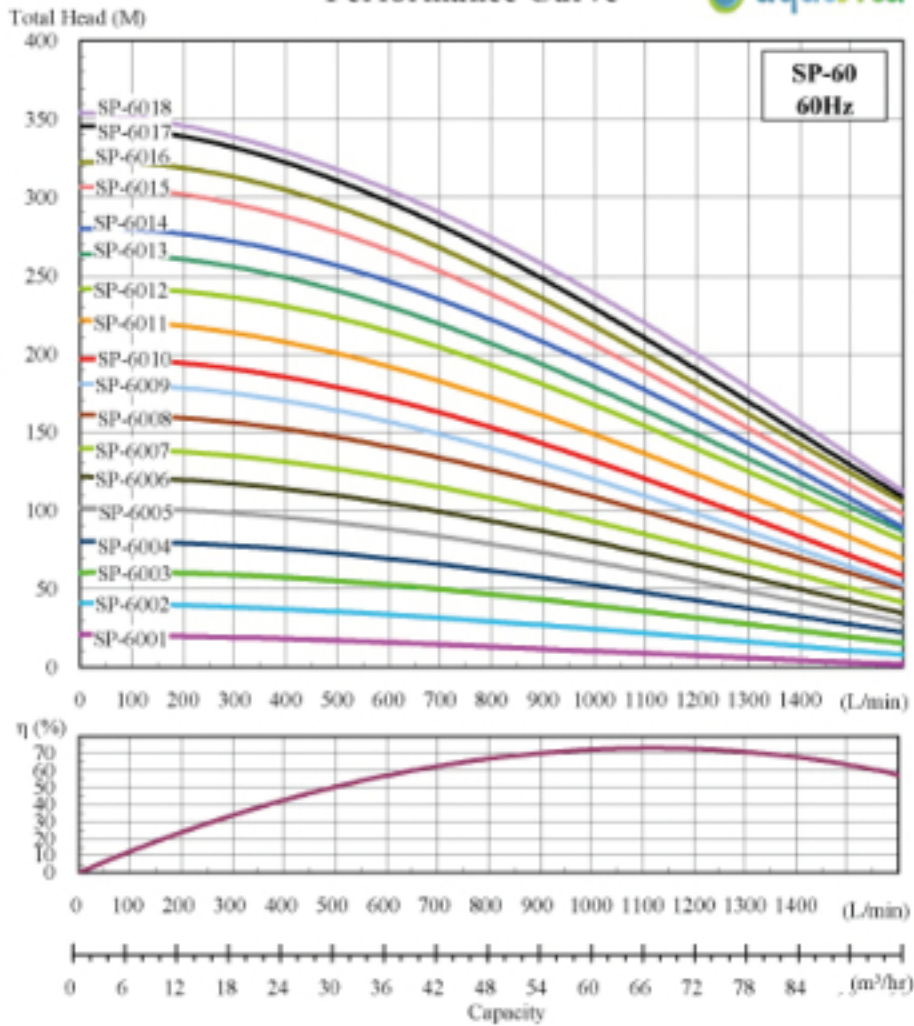

TYPE	Dimensions(mm)				Weight KG	Motor		Max.current t		TOTAL HEAD M	HEAD M	MP/hr						
	A	B	C	D		HP	Kw	220V	380V			0	24	42	60	78	90	
												L/min						
												0	400	700	1000	1300	1500	
SP-6001	4"	132	152	391	6.4	5	3.7	17.8	10.7	21	10	21	19	14	10	7	3	
SP-6002				504	8.7	7.5	5.5	24.6	14.9	41	24	41	38	31	24	17	11	
SP-6003				617	11	12.5	9.3	42.3	25.6	60	38	60	59	49	38	29	20	
SP-6004				730	13.3	15	11	47.4	28.6	80	51	80	77	65	51	39	28	
SP-6005				843	15.6	17.5	13	55	33.3	101	66	101	98	82	66	50	36	
SP-6006				956	17.9	25	18.5	75	45	121	78	121	117	97	78	60	43	
SP-6007				1069	20.2	25	18.5	75	45	139	91	139	134	113	91	70	51	
SP-6008				1182	22.5	30	22	90.4	54.7	160	106	160	160	156	131	106	83	61
SP-6009				1295	24.8	35	26	106.6	64.5	180	117	180	174	146	117	90	65	
SP-6010				1408	27.1	35	26	106.6	64.5	196	129	196	189	160	129	99	72	
SP-6011				1521	29.4	40	30	124	75	220	146	220	214	177	146	114	84	
SP-6012				1634	31.7	50	37	154	93	240	164	240	236	200	164	129	97	
SP-6013				1747	34	50	37	154	93	262	174	262	255	215	174	138	104	
SP-6014				1860	36.3	50	37	154	93	278	187	278	272	230	187	149	109	
SP-6015				1973	38.6	60	45	182	110	305	200	305	294	249	200	158	118	
SP-6016				2086	40.9	60	45	182	110	321	212	321	309	266	212	166	126	
SP-6017				2199	43.2	60	45	182	110	344	223	344	328	279	223	175	131	
SP-6018				2312	45.5	75	55	214	130	353	238	353	334	285	238	181	135	